



RAFFA'S

CONVECTION OVENS

RAFFAS.CO.ZA



EQUIPMENT

OVENS



EXPLORA PIRON

COP5024

CONVECTION OVEN PIRON [CABOTO] - MANUAL NO HUMIDITY

SPECIFICATIONS

OUTSIDE DIMENSIONS:	APPROX. 8KG OF FRENCH FRIES/HR
LOAD CAPACITY:	4 TRAYS 480 X 345MM OR GN 2/3
SPACE BETWEEN TRAYS:	75MM
POWER VOLTAGE:	3.3KW - 230V - 50/60HZ
TEMPERATURE:	30°C - 260°C
WEIGHT:	37KG

EQUIPED WITH:

2 HIGH SPEED MOTORS - SINGLE SPEED
(TRAYS SOLD SEPERATELY)



EKA

4 PAN MANUAL CONTROL

SPECIFICATIONS

ELECTRICITY:	6.4KW, 380V, 3 PHASE + N
DIMENSIONS:	790 X 785 X 635MM HIGH
WEIGHT:	57KG
CHAMBER DIMENSIONS:	660 X 430 X 380MM HIGH
CAPACITY:	(4X) 1/1 GN PANS (4X) 600 X 40MM TRAYS
RUNNER SPACING:	73MM
TEMPERATURE RANGE:	30°C - 270°C



EKF416ALUD	RIGHT HAND HINGED DOOR MODEL: EKA EKF 416 ALUD
EKF416UD	BOTTOM HINGED DOOR MODEL: EKA EKF 416 UD
GNF8065	PERFORATED INSERTS 1/1 GN PAN - 65MM
GNF8065.P	PERFORATED INSERTS 1/1 GN PAN - 65MM
BTA0013	BAKING TRAYS 600 X 400 X 20MM
OGS0011	1/1 GN PAN GRID
OGS0064	600 X 400MM GRID
SOE0416	OVEN STAND



EXPLORA PIRON

COP8004

CONVECTION OVEN PIRON [CABOTO] - MANUAL WITH HUMIDITY

SPECIFICATIONS

OUTSIDE DIMENSIONS:	800 X 760 X 535MM
LOAD CAPACITY:	4 TRAYS 600 X 400MM OR GN 1/1
SPACE BETWEEN TRAYS:	75MM
POWER VOLTAGE:	6.5KW - 230/400V - 50/60HZ
TEMPERATURE:	50°C - 280°C
WEIGHT:	55KG

EQUIPED WITH:

2 HIGH SPEED MOTORS WITH REVERSE GEAR
(TRAYS SOLD SEPERATELY)



EKA

HUMIDIFICATION (PULSE)

EKF416

4 PAN WITH HUMIDIFICATION

SPECIFICATIONS

MODEL:	EKA EKF 416
ELECTRICITY:	3.4KW, 220V, SINGLE PHASE
DIMENSIONS:	790 X 750 X 635MM HIGH
WEIGHT:	51KG
CHAMBER DIMENSIONS:	660 X 445 X 380MM HIGH
CAPACITY:	(4X) 1/1 GN PANS (4X) 600 X 40MM TRAYS
RUNNER SPACING:	73MM
TEMPERATURE RANGE:	50°C - 300°C



BTA0013	BAKING TRAYS 600 X 400 X 20MM
OGS0011	1/1 GN GRID
OGS0064	600 X 400MM GRID
SOE0416	OVEN STAND

EQUIPMENT

OVENS



EXPLORA PIRON

COP8004

CONVECTION OVEN PIRON [CABOTO] - DIGITAL WITH HUMIDITY

SPECIFICATIONS

OUTSIDE DIMENSIONS:	800 X 760 X 535MM
LOAD CAPACITY:	4 TRAYS 600 X 400MM OR GN 1/1
SPACE BETWEEN TRAYS:	75MM
POWER VOLTAGE:	6.5KW - 230/400V - 50/60HZ
TEMPERATURE:	50°C - 280°C
WEIGHT:	55KG

EQUIPED WITH:

- 2 HIGH SPEED MOTORS WITH REVERSING GEAR
- 3 COOKING PHASES



EKA

EKF416DUD

4 PAN DIGITAL CONTROL

SPECIFICATIONS

MODEL:	EKA EKF 416 DUD
ELECTRICITY:	6.4KW, 380V, 3 PHASE + N
DIMENSIONS:	790 X 750 X 635MM HIGH
WEIGHT:	58KG
CHAMBER DIMENSIONS:	660 X 445 X 380MM HIGH
CAPACITY:	(4X) 1/1 GN PANS (4X) 600 X 40MM TRAYS
RUNNER SPACING:	73MM
TEMPERATURE RANGE:	30°C - 270°C
NUMBER OF PROGRAMS:	99
PROG. COOKING STEPS:	4
PRE-HEAT TEMPERATURE:	180°C



EXPLORA PIRON

COP9001

COMBI STEAM OVEN PIRON [MAGELLANO] - STAINLESS STEEL STAND

SPECIFICATIONS

DIMENSIONS:	920 X 850 X 950MM
WEIGHT:	30KG



EXPLORA PIRON

COP9007

COMBI STEAM OVEN PIRON [MAGELLANO] - STAINLESS STEEL STAND - LOW

SPECIFICATIONS

DIMENSIONS:	920 X 850 X 600MM
WEIGHT:	21KG



EXPLORA PIRON

COP8001

CONVEC OVEN PIRON [CABOTO] - STAINLESS STEEL STAND

SPECIFICATIONS

DIMENSIONS:	700 X 600 X 950MM
WEIGHT:	22KG

EQUIPED WITH:

- TRAY HOLDER FOR 4 TRAYS



EQUIPMENT

OVENS



EXPLORA PIRON

COP7710

COMBI STEAM OVEN PIRON [GALILEI PLUS] - 10 PAN

SPECIFICATIONS

N° TRAYS:	10
COMPATIBLE TRAYS:	EN 600 X 400 / GN 1/1
OUTSIDE DIMENSIONS (W X D X H) (MM):	780 X 850 X 1200MM
SPACE BETWEEN TRAYS (MM):	80
POWER (KW):	15.7
VOLTAGE:	400V 3N°
WEIGHT:	121
N° SERVINGS:	90 - 150

COP7006

GALILEI / CABOTO / STAINLESS STEEL STAND / LOW

SPECIFICATIONS

OUTSIDE DIMENSIONS:	780 X 760 X 600MM
WEIGHT:	5KG

(TRAYS SOLD SEPARATELY)



EKA

MKF1064S

10 TRAY BAKERY

SPECIFICATIONS

MODEL:	EKA MKF 1064 S
ELECTRICITY:	15.4KW, 380V, 3 PHASE + N
DIMENSIONS:	850 X 1041 X 1130MM HIGH
WEIGHT:	140KG
CAPACITY:	(10X) 600 X 40MM TRAYS
RUNNER SPACING:	80MM
NUMBER OF FANS:	(3X) BIDIRECTIONAL
TEMPERATURE RANGE:	30°C - 270°C



BTA0064

OGS0064

MKF -MKTS1064-L

MKF -MKTS664-L

EFK -EKKD

BAKING TRAYS 600 X 400 X 30MM

600 X 400MM GRID

STAND FOR MKF1064S

STAND FOR MK664S

CLEANING MANUAL SPRAY KIT



EXPLORA PIRON

COP7720

COMBI STEAM OVEN PIRON [GALILEI PLUS] - 20 PAN

SPECIFICATIONS

N° TRAYS:	20
COMPATIBLE TRAYS:	GN 1/1
OUTSIDE DIMENSIONS:	W: 940 X D: 1000 X H:1930MM
SPACE BETWEEN TRAYS:	67MM
POWER (KW):	36
VOLTAGE:	400V 3N°
WEIGHT:	250
N° SERVINGS:	130 - 200

COMES STANDARD WITH 20 TRA GN1 TROLLEY

COP2001

OPTIONAL 16 TRAY TROLLEY

SPECIFICATIONS

OUTSIDE DIMENSIONS:	600 X 400MM
---------------------	-------------

EQUIPED WITH:

TRAY HOLDER 16 TRAYS (TRAYS SOLD SEPARATELY)



EQUIPMENT

OVENS



EXPLORA PIRON

COP7706

GALILEI PLUS - 6 PAN

SPECIFICATIONS

POWER:	10.5kW
VOLTAGE:	400V 3N~ / 230V 1N~
OUTSIDE DIMENSIONS:	780 X 850 X 830MM
SPACE BETWEEN TRAYS:	80MM
WEIGHT:	90KG
N° TRAYS:	6
COMPATIBLE TRAYS:	EN 600 X 400 / GN 1/1

OTHER ORDER CODES

COP8001

800 - STAINLESS STEEL STAND

SPECIFICATIONS

OUTSIDE DIMENSIONS:	780 X 850 X 940MM
WEIGHT:	21KG

NOTE

Requires to be installed by a qualified electrical installer
Power cable not included



EKA



MKF711S

7 PAN GASTRONOMY

SPECIFICATIONS

MODEL:	EKA MKF 711 S
ELECTRICITY:	10.4KW, 380V, 3 PHASE + N
DIMENSIONS:	730 X 855 X 850MM HIGH
WEIGHT:	96KG
CAPACITY:	(7X) 1/1 GN PANS
RUNNER SPACING:	68MM
NUMBER OF FANS:	(2X) BIDIRECTIONAL
TEMPERATURE RANGE:	100 TO 270 °C

GNF8055

INSERTS 1/1 GN PAN - 55MM

GNF8055.P

INSERTS 1/1 GN PAN - 55MM (PERFORATED)

GNF8040

INSERTS 1/1 GN PAN - 40MM

GNF8040.P

INSERTS 1/1 GN PAN - 40MM (PERFORATED)

OGS0011

1/1 GRID

EFK -EKKD

CLEANING MANUAL SPRAY KIT



EKA



MKF664S

6 TRAY BAKERY

SPECIFICATIONS

MODEL:	EKA MKF 664 S
ELECTRICITY:	10.4KW, 380V, 3 PHASE + N
DIMENSIONS:	850 X 1041 X 850MM HIGH
WEIGHT:	108KG
CAPACITY:	(6X) 600 X 400MM TRAYS
RUNNER SPACING:	80MM
NUMBER OF FANS:	(2X) BIDIRECTIONAL
TEMPERATURE RANGE:	100 TO 270 °C

BTA0064

BAKING TRAYS 600 X 400 X 30MM

OGS0064

600 X 400MM GRID

MKF -MKTS664-L

STAND FOR MK664S

EFK -EKKD

CLEANING MANUAL SPRAY KIT



EQUIPMENT

OVENS



ANVIL

COA2006 - R01
CONVECTION OVEN ANVIL - 6 PAN

SPECIFICATIONS

CAPACITY:	6 TRAYS 600 X 400MM OR GN1/1
POWER:	12KW
VOLTAGE:	380V - 3 PHASE
RUNNING SPACE:	80MM
CHAMBER DIMENSIONS:	702 X 570 X 628MM
DIMENSIONS:	1007 X 1061 X 856MM
WEIGHT:	124KG



ANVIL

COA2010 - R01
CONVECTION OVEN ANVIL - 10 PAN

SPECIFICATIONS

CAPACITY:	10 TRAYS 600 X 400MM OR GN1/1
POWER:	18KW
VOLTAGE:	380V - 3 PHASE
RUNNING SPACE:	80MM
CHAMBER DIMENSIONS:	702 X 570 X 988MM
DIMENSIONS:	1007 X 1061 X 1213MM
WEIGHT:	145KG

OVEN TRAYS

NOTE: SUITABLE FOR THE GRANDE FORNI OVENS, ANVIL AND PIRON COMBI STEAM OVENS (6-10PAN)



COR3001
CHROME GRID ONLY
SPECIFICATIONS
DIMENSIONS: 600 X 400MM



COR3003
BAKING TRAY PERFORATED
SPECIFICATIONS
DIMENSIONS: 600 X 400 X 10MM



BTA0011
BAKING TRAY ALLUMINIUM
SPECIFICATIONS
DIMENSIONS: 600 X 400 X 20MM

OVEN STANDS



ANVIL

COA1011
CONVECTION OVEN ANVIL - STAND

SPECIFICATIONS

DIMENSIONS:	860 X 750 X 725MM
SUITABLE FOR:	COA2006 AND COA2010

EQUIPMENT

OVENS



ANVIL

COA1005

CONVECTION OVEN ANVIL - GRANDE FORNI - MECHANICAL

SPECIFICATIONS

POWER:	5.6KW
VOLTAGE:	230V - 2PHASE - 50HZ
DIMENSIONS:	835 X 800 X 596MM
CHAMBER DIMENSIONS:	704 X 494 X 352
RUNNER SPACING:	75MM
WEIGHT:	67KG
INCLUDES:	2X CHROME GRIDS
SHELF CAPACITY:	4



EKA

EKF432

4 PAN MANUAL CONTROL

SPECIFICATIONS

MODEL:	EKA EKF 423P
ELECTRICITY:	2.8KW, 220V, SINGLE PHASE
DIMENSIONS:	590 X 695 X 590MM HIGH
WEIGHT:	35KG
CHAMBER DIMENSIONS:	450 X 395 X 330MM HIGH
CAPACITY:	(4X) 430 X 345MM TRAYS
RUNNER SPACING:	73MM
TEMPERATURE RANGE:	50°C - 300°C



BTA0043
COA2003
SOE0423

BAKING TRAYS 435 X 315 X 10MM
435 X 315MM OVEN GRID
OVEN STAND



ANVIL

COR0005

CONVECTION OVEN GRANDE FORNI STAND ONLY

SPECIFICATIONS

DIMENSIONS:	840 X 710MM X 900MM
-------------	---------------------



ANVIL

COA1003

CONVECTION OVEN ANVIL - PRIMA

SPECIFICATIONS

POWER:	2.4KW
VOLTAGE:	230V - 50HZ
DIMENSIONS:	602 X 652 X 596MM
CHAMBER DIMENSIONS:	470 X 330 X 350 - 2FANS
RUNNER SPACING:	40 - 70MM
WEIGHT:	34KG
INCLUDES:	4X CHROME GRIDS - 445 X 320MM TIMER FUNCTION

EQUIPMENT

OVENS



ANVIL

COA1004

CONVECTION OVEN ANVIL - PRIMA PROMO - GRILL & TIMER
SPECIFICATIONS

POWER: 2.4KW
VOLTAGE: 230V - 50HZ
DIMENSIONS: 602 X 652 X 596MM
CHAMBER DIMENSIONS: 470 X 330 X 350 - 2FANS
RUNNER SPACING: 40 - 70MM
WEIGHT: 34KG
INCLUDES: 4X CHROME GRIDS
GRILL FUNCTION AND TIMER



EKA

EKF423M

4 PAN MANUAL MULTI-FUNCTIONAL
SPECIFICATIONS

MODEL: EKA EKF 423M
ELECTRICITY: 2.8KW, 220V, SINGLE PHASE
DIMENSIONS: 590 X 695 X 590MM HIGH
WEIGHT: 35KG
CHAMBER DIMENSIONS: 450 X 395 X 330MM HIGH
CAPACITY: (4X) 430 X 345MM TRAYS
RUNNER SPACING: 73MM
TEMPERATURE RANGE: 50°C - 300°C



BTA0043
COA2003
SOE0423

BAKING TRAYS 435 X 315 X 10MM
435 X 315MM GRID
OVEN STAND

TRAYS

SUITABLE FOR THE PRIMA AND PRIMA PRO




COA2004

CONVECTION OVEN ANVIL - SOLID TRAY PRIMA
SPECIFICATIONS
DIMENSIONS: 435 X 315 X 10MM



COA0010

BAKING TRAY PERFORATED
SPECIFICATIONS
DIMENSIONS: 435 X 315 X 10MM

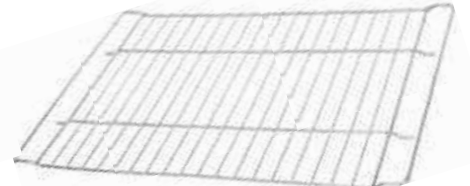

COA2003

PRIMA / PRO OVEN ANVIL - SHELF
SPECIFICATIONS
DIMENSIONS: 435 X 315MM

CONVECTION OVENS - MECHANICAL

FEATURES

- S/Steel exterior and interior
- Rounded interior corners and removable shelf runners ensure ease of cleaning
- A bake timer is also included to automatically switch off after a preset period
- Grill element ideal for browning and grilling for Prima Pro
- Interior light is fitted as a standard feature
- The oven is fan assisted and fitted with a custom designed baffle plate. Achieving excellent temperature distribution ensures reliable baking uniformity and perfectly baked products on both sides, making it superior to static ovens.
- Operating temperature: 50°C - 300°C

2 YEAR WARRANTY



PRIMA COA1003

SPECIFICATIONS

POWER	: 2.4kW
VOLTAGE	: 230V
DIMENSIONS	: 602 X 652 X 596MM
CHAMBER DIMENSIONS	: 470 X 330 X 350MM - 2 fans
RUNNER SPACING	: 40 - 70MM
WEIGHT	: 34KG
INCLUDES	: 4 X Chrome grids - 445 X 320MM : Timer function
SHELF CAPACITY	: 4

Note

Refer to page 43 for trays & grids

2 YEAR WARRANTY



PRIMA PRO - GRILL & TIMER COA1004

SPECIFICATIONS

POWER	: 2.4kW
VOLTAGE	: 230V
DIMENSIONS	: 602 X 652 X 596MM
CHAMBER DIMENSIONS	: 470 X 330 X 350MM - 2 fans
RUNNER SPACING	: 40 - 70MM
WEIGHT	: 34KG
INCLUDES	: 4 X Chrome grids - 445 X 320MM : Grill function and timer
SHELF CAPACITY	: 4

Note

Refer to page 43 for trays & grids

FEATURES

- Can accommodate 600 x 400mm baking trays and GN1/1 pans
- Steam injection for manual humidity control which allows for browning of pastry and bread products
- Operating temperature: 50°C - 300°C
- Easily removable inner glass for cleaning
- The oven's fans and custom baffle plate ensure consistent temperature distribution, even when fully loaded.

2 YEAR WARRANTY



GRANDE FORNI COA1005

SPECIFICATIONS

POWER	: 5.6kW
VOLTAGE	: 230V - 2 phase (N+E)
DIMENSIONS	: 835 X 800 X 596MM
CHAMBER DIMENSIONS	: 704 X 494 X 352MM
RUNNER SPACING	: 75MM
WEIGHT	: 67KG
INCLUDES	: 2 X chrome grids
SHELF CAPACITY	: 4

Note

Power cable not included
Refer to page 43 for trays



HEATING

CONVECTION OVENS

FEATURES

- Ideal for bakeries, cafés, and prep kitchens needing consistent results without overcomplicating things.
- Compact But Commercial – Powerful outputs (up to 6.5kW) and GN1/1 tray compatibility in a small footprint
- Choice of Controls – Easy-to-use manual dials or precise digital options depending on kitchen needs
- Even Bake Consistency – Designed for uniform air circulation and reliable baking performance
- Hygienic & Durable – All-stainless steel construction ensures long-lasting, easy-to-clean use
- Smart Alternative to High-Cost Imports – Delivers the same functionality at a more accessible price

2 YEAR WARRANTY



MARCONI - MECHANICAL NO HUMIDITY COP1204

SPECIFICATIONS

POWER VOLTAGE	: 3.3kW - 230V - 50/60 Hz
TEMPERATURE	: 30°C - 260°C
OUTSIDE DIMENSIONS	: 600 X 600 X 540MM
SPACE BETWEEN TRAYS	: 75MM
WEIGHT	: 37KG
CAPACITY	: 4 Trays 480 X 345MM

2 YEAR WARRANTY



MARCONI - MECHANICAL NO HUMIDITY COP1224

SPECIFICATIONS

POWER VOLTAGE	: 6.5kW - 230/400V - 50/60 Hz
TEMPERATURE	: 30°C - 260°C
OUTSIDE DIMENSIONS	: 800 X 760 X 540MM
SPACE BETWEEN TRAYS	: 75MM
WEIGHT	: 55KG
CAPACITY	: 4 Trays 600 X 400MM or GN 1/1

2 YEAR WARRANTY



MARCONI - DIGITAL NO HUMIDITY COP1214

SPECIFICATIONS

POWER VOLTAGE	: 6.5kW - 230/400V - 50/60 Hz
TEMPERATURE	: 30°C - 260°C
OUTSIDE DIMENSIONS	: 800 X 760 X 540MM
SPACE BETWEEN TRAYS	: 75MM
WEIGHT	: 55KG
CAPACITY	: 4 Trays 600 X 400MM or GN 1/1

OTHER ORDER CODES

800 - S/STEEL STAND COP8001

SPECIFICATIONS

OUTSIDE DIMENSIONS	: 780 X 760 X 950MM
WEIGHT	: 22KG

NOTE

Requires to be installed by a qualified electrical installer
Power cable not included
Refer to page 54 for trays

CONVECTION OVENS

MILLENNIAL MANUAL CONTROL



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm - thick, moulded, AISI 304 18/10 stainless steel with fully rounded edges
- Cooking chamber lighting via LED Bar fitted into the door
- Manual control panel situated on the right hand side of the door
- Door is right hand hinged with adjustable door hinges and handle catch
- The side supports and drip tray can easily be removed for cleaning
- Manual hand spray/wash can be fitted
- Fitted with a condensate collection bowl, with drain on door
- Timer for cooking from 10 to 120 minutes / infinity
- Supplied without trays and grids
- IPX3 protection rating against water
- Supplied without stand
- Fitted with bidirectional fan motors for even heat distribution



6 TRAY

SPECIFICATIONS

MODEL	EKA MKF 664 SP
ELECTRICITY	10.4kW, 380V, 3 Phase + N
DIMENSIONS	850 x 1041 x 850mm high
WEIGHT	108kg
CAPACITY	(6x) 600 x 400mm pans
RUNNER SPACING	80mm
NUMBER OF FANS	(2x) bidirectional
TEMP RANGE	100 to 270 °C

ORDER CODE

MKF664SP



OPTIONAL EXTRAS (FULL SPECS • PAGE 72 - 73)

BAKING TRAYS

600 x 400 x 30mm

BTA0064

GRIDS

600 x 400mm Grid

OGS0064

STAND

Stand for MKF664SP

MKF-MKTS664-L



NEW LOOK



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick AISI 430 18/10 stainless steel with fully rounded edges
- 1 halogen light fitted into the cooking chamber
- The side supports and drip tray can easily be removed for cleaning
- Electromechanical control panel fitted at the bottom of the door
- Fitted with 2 bidirectional fan motors for even heat distribution
- IPX3 protection rating against water
- Stackable
- Supplied without trays and grids
- Bottom hinged door
- Supplied without stand



HUMIDIFICATION (PULSE)

4 PAN WITH HUMIDIFICATION

SPECIFICATIONS

MODEL	EKA EKF 416
ELECTRICITY	3.4kW, 220V, Single Phase
DIMENSIONS	790 x 750 x 635mm high
WEIGHT	51kg
CHAMBER DIMENSIONS	660 x 445 x 380mm high

CAPACITY	(4x) 1/1 GN pans (4x) 600 x 400mm trays
RUNNER SPACING	73mm
TEMP RANGE	50 to 300°C

ORDER CODE

EKF416



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick AISI 304 18/10 stainless steel with fully rounded edges
- 1 halogen light fitted into the cooking chamber
- Available in bottom or right hand hinged door models
- The side supports and drip tray can easily be removed for cleaning
- Electromechanical control panel situated at the bottom of the door
- Fitted with a bidirectional fan motor for even heat distribution
- IPX3 protection rating against water
- Supplied without trays and grids
- Stackable
- Supplied without stand

4 PAN

SPECIFICATIONS

ELECTRICITY	6.2kW, 380V, 2 Phase + N
DIMENSIONS	790 x 750 x 635mm high
WEIGHT	51kg
CHAMBER DIMENSIONS	660 x 445 x 380mm high
CAPACITY	(4x) 1/1 GN Pans (4x) 600 x 400mm trays
RUNNER SPACE	73mm
TEMP RANGE	50 to 300°C

RIGHT HAND HINGED DOOR

MODEL	EKA EKF 416 ALP
ORDER CODE	EKF416ALP

BOTTOM HINGED DOOR

MODEL	EKA EKF 416 P
ORDER CODE	EKF416P



OPTIONAL EXTRAS (FULL SPECS • PAGE 72 - 73)

BAKING TRAY

600 x 400 x 20mm

BTA0013

OVEN GRIDS

1/1 GN GRID
600 x 400mm GRID

OGS0011
OGS0064

OVEN STAND

ORDER CODE

SOE0416

CONVECTION OVENS

EVOLUTION MANUAL CONTROL



NEW LOOK



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick AISI 304 18/10 stainless steel with fully rounded edges
- 1 halogen light fitted into the cooking chamber
- The side supports and drip tray can easily be removed for cleaning
- Bottom hinged door
- Electromechanical control panel situated at the bottom of the door
- Fitted with 1 unidirectional fan motor for even heat distribution
- IPX3 protection rating against water
 - Stackable
- Supplied without stand
 - Supplied without grids
- Supplied with (4x) 430 x 345mm baking sheets

4 PAN MULTI-FUNCTIONAL

SPECIFICATIONS

MODEL	EKA EKF 423 M
ELECTRICITY	2.8kW, 220V, Single Phase
DIMENSIONS	590 x 695 x 590mm high
WEIGHT	35kg
CHAMBER DIMENSIONS	450 x 395 x 330mm high

CAPACITY	(4x) 430 x 345mm trays
RUNNER SPACING	73mm
TEMP RANGE	50 to 300°C

ORDER CODE

EKF423M



NEW LOOK



FEATURES

- Outer casing manufactured from stainless steel
- Cooking chamber is manufactured from 1mm thick AISI 304 18/10 stainless steel with fully rounded edges
- 1 halogen light fitted into the cooking chamber
- The side supports and drip tray can easily be removed for cleaning
- Bottom hinged door
- Electromechanical control panel situated at the top of the door
- Fitted with a unidirectional fan motor for even heat distribution
- IPX3 protection rating against water
 - Stackable
- Supplied without stand
 - Supplied without grids
- Supplied with (4x) 430 x 345mm baking sheets

4 PAN MANUAL CONTROL

SPECIFICATIONS

MODEL	EKA EKF 423 P
ELECTRICITY	2.8kW, 220V, Single Phase
DIMENSIONS	590 x 695 x 590mm high
WEIGHT	35kg
CHAMBER DIMENSIONS	450 x 395 x 330mm high

CAPACITY	(4x) 430 x 345mm trays
RUNNER SPACING	73mm
TEMP RANGE	50 to 300°C

ORDER CODE

EKF423



OPTIONAL EXTRAS (FULL SPECS • PAGE 72 - 73)

BAKING TRAY

430 x 345 x 10mm

BTA0043

OVEN STAND

ORDER CODE

SOE0423

OVEN GRID

430 x 345mm GRID

COA2003